



Low Distortion USB 2.0 Camera Module



1MP JXH62
(SKU: UB0235)

QUICK START GUIDE

SPECS

| Camera | |
|---------------------------------|--|
| Sensor | 1/4" JXH62 |
| Resolution | 1MP 1280H x 720V |
| Data Format | MJPEG/YUY2 |
| Frame Rate | MJPG 30fps@1280 x 720/640 x 480/320 x 240; YUY2 10fps@1280 x 720; 30fps@640 x 480/320 x 240. |
| Lens | |
| Field of View (FOV) | 60°(H) |
| Lens Mount | M12*P0.5 mm |
| IR Sensitivity | Integral IR filter, visible light only |
| Functionality and Compatibility | |
| Auto Controlled Features | Contrast/ Saturation/ Exposure / White balance / Acutance |
| System Compatibility | Windows XP (SP2/SP3), Vista 7/8/10, Linux and Mac with UVC |
| Power | |
| Power Supply | DC 5V |
| Working Current | MAX 200mA |
| Physical | |
| Operating Temp. | -4°F~158°F (-20°C~+70°C) |
| Dimension | 32x32mm |
| Connector No. | ZHR-4 |
| Cable Length | 3.3ft (1M) |

INTRODUCTION

• About Arducam

Arducam has been a professional designer and manufacturer of SPI, MIPI, DVP and USB cameras since 2012. We also offer customized turnkey design and manufacturing solution services for customers who want their products to be unique.

• About this USB Camera

The UB0235 is a new member of the Arducam's USB camera family. It's a 1MP, UVC compliant, low distortion USB 2.0 camera. This USB camera is based on the 1/4" JXH62 image sensor, and you can read more about its specs in the next chapter. Arducam also provides the sample application that demonstrates some of the features of this camera.

• About UVC

The UB0235 is a UVC-compliant camera. The native UVC drivers of Windows, Linux and Mac shall be compatible with this camera so that it does not require extra drivers to be installed.

• About Customer Service

If you need our help or want to customize other models of USB cameras, feel free to contact us at support@arducam.com

QUICK START

• How to download the program

Download the APP Amcap from the following link <https://www.arducam.com/downloads/app/AMCap.exe>

NOTE:

1. If used with the Andriod device, USB Camera APP and connect adapter are needed.
2. For Mac OS, please open the native software facetime and select the video camera "USB Camera" .

• How to connect the camera


Connect the one end of the USB 2.0 cable to the USB 2.0 connector provided on the back of UB0235, and connect the other end to the USB 2.0 host controller on the computer.

How to use the program (Windows demo only)

The Menu bar at the top of the shown image contains few menu items and the current preview resolution and the frame rate are displayed on the bottom bar when the application is running. The following sections describe each of the menu items in detail.


• Menu>Devices

This menu will show the available video devices to host PC. The UB0235 named "USB Camera".





• Menu>Options

The options menu can be used to select the preview and image parameters supported by this camera.





How to use the program (Windows demo only)

- Video Capture Pin

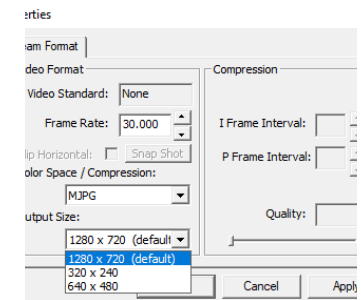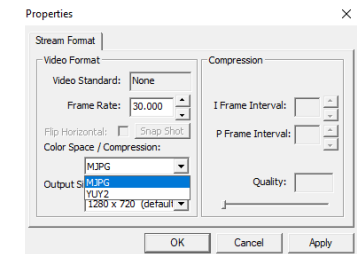

How to use the program (Windows demo only)

- Video Capture Filter -> Video Proc Amp/Camera Control

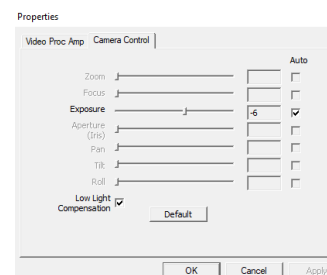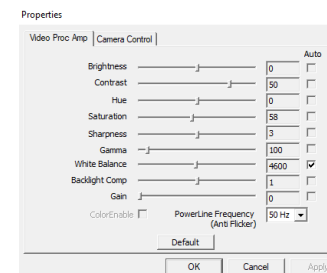

How to use the program (Windows demo only)

• Menu > Capture

The capture menu is used to capture the still image and video by using this application. You can also select the related parameters.

